



Maximum Performance



**TAKING CARE OF YOUR
TOUGHEST LAUNDRY CHALLENGES.**

UNIMAC.COM


UT SERIES 120-200 LB PREMIUM TUMBLE DRYERS

MAXIMUM PERFORMANCE WITH MORE CONTROL

Quality results are the goal of your on-premises laundry. However, you also want advanced functionality and access to the data that enables you to better manage your resources. UniMac® Premium tumble dryers deliver exceptional performance along with our legendary durability, while offering complete control of the operation.

LOWER YOUR COSTS WITH UNIMAC

Drying cycles are usually 30 percent longer than wash cycles. Reducing dry times to match wash times enables you to run your laundry at maximum efficiency. Our dryers are designed for fast drying, while balancing energy costs. With more than 70 years of dryer engineering experience, we have found the perfect balance between drying time and actual Btu usage to conserve energy, maximize throughput and lower labor costs.

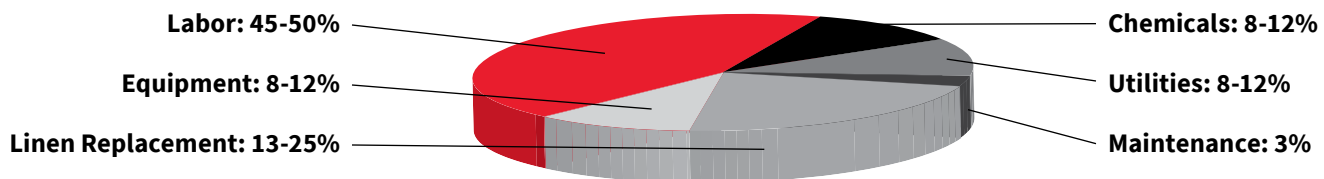

OPTidry™

OVER-DRY PREVENTION TECHNOLOGY

UniMac's optional OPTidry system takes efficiency further by eliminating costly over-drying. Removing over-drying from your laundry not only reduces utility expenses, but also curbs labor costs and extends linen life, saving up to thousands of dollars annually.



INDUSTRY-LEADING DURABILITY

When it comes to your machine lasting longer and looking good, the difference is in the details. And that's where UniMac shines. Our tumble dryers incorporate a durable cart bumper and kick plate to protect dryer fronts from scratches and dents incurred during the laundering process. Constructed of high-grade steel, our heavy-duty door and two-point hinges will stand up to the toughest laundry conditions.




SPECIAL ENCAPSULATED HEAT SYSTEM

UniMac's enclosed heat system boosts efficiency and helps you keep your laundry environment more comfortable. Energy costs and drying times are reduced because radiant heat from the stove top is used to preheat intake air before it enters the combustion chamber.



Proudly based in Ripon, Wisconsin, USA, UniMac is dedicated to research, development and testing to provide equipment that delivers industrial strength and long-lasting quality. Our products undergo a 5-stage product-development process and are pushed beyond their limits in our state-of-the-art test lab to ensure they exceed the toughest demands of the commercial environment and meet our customers' highest standards.

MORE CONTROL OPTIONS



UniLinc™ **TotalVue™**
POWERED BY UNILINC®

The industry-exclusive UniLinc system from UniMac® represents the pinnacle of laundry management.

1. **FLEXIBLE OPERATION** UniLinc allows any combination up to 48 auto-dry, moisture-dry and time-dry cycles to be customized using real words instead of codes.
2. **EASY TO USE** Get started with the push of just two buttons.
3. **MONITOR YOUR LAUNDRY** Record start, stop and idle time between cycles to track the efficiency of your labor.
4. **REDUCE DOWNTIME** Receive automatic reminders of daily, weekly and monthly maintenance schedules, while machine errors are recorded by date and time for quick diagnosis and repair.



M SERIES CONTROL

This customizable control allows any combination up to 30 auto-dry and time-dry cycles to be saved, providing easy user interface.



DUAL DIGITAL CONTROL (DDC)

This economy control allows for the operator to select the ideal temperature, heating time and cooling time for each use.

C.A.R.E.™

In the unlikely event of a linen fire within the cylinder, our optional Combustion Automated Response Equipped (C.A.R.E.) system, a multiport water manifold system, will saturate the linens in the cylinder. It can also activate an alarm at a remote location.

PEACE OF MIND

UniMac offers a limited warranty for any part of the commercial dryer which fails as a result of a defect in materials or workmanship during the first three years (36 months) after the date of original installation.*

*Parts only, labor not included. See UniMac Warranty Bond for specifics.

120-200 LB TUMBLE DRYERS AT A GLANCE

- Multiple-burner heat system provides quick, stable temperature control
- Stove top and burners can be removed to fit through a standard door opening
- Electrostatically applied paint, available in white or gray
- Self-cleaning lint filter
- Galvanized, precoated steel cylinder
- Embossed-steel front and side panels
- Standard reversing cylinder
- Extended tumble helps prevent wrinkling
- Long-lasting, 7/8" heavy-duty, rubber door gasket
- 120-pound model offered with electric heat



UT SERIES PREMIUM TUMBLE DRYERS 120-200 LB

SPECIFICATIONS		UT120	UT170	UT200
Control Options		UniLinc, M Series, DDC	UniLinc, M Series, DDC	UniLinc, M Series, DDC
Capacity - lb (kg)		120 (55)	170 (77)	200 (90)
Cylinder Diameter - in (mm)		44 (1120)	50.8 (1290)	50.8 (1290)
Cylinder Depth - in (mm)		41 (1040)	42.5 (1080)	50 (1270)
Cylinder Volume - cu ft (liters)		36.1 (1020)	49.8 (1410)	58.6 (1660)
Overall Width - in (mm)		46.1 (1170)	52.9 (1345)	52.9 (1345)
Overall Depth - in (mm)		67.9 (1725)	69.8 (1772)	77.3 (1965)
Overall Height - in (mm)		85.7 (2175)	94 (2390)	94 (2390)
Door Opening Size		26.9 (683)	26.9 (683)	26.9 (683)
Water Inlet Size (C.A.R.E.™ System)		(1) 3/4"-11 1/2" NH Hose Connection	(1) 3/4"-11 1/2" NH Hose Connection	(1) 3/4"-11 1/2" NH Hose Connection
Energy Data	Gas Models	270,000 Btu/hr	395,000 Btu/hr	425,000 Btu/hr
	Steam Models	187,560 Btu/hr	265,563 Btu/hr	265,564 Btu/hr
	Electric Models	60 kW	-	-
Utility Connection - in (mm)	Gas Models	1 NPT	1 NPT (13)	1 NPT (13)
	Steam Models	0.75 NPT	0.75 NPT (inlet), 1 NPT (outlet)	0.75 NPT (inlet), 1 NPT (outlet)
Air Outlet - in (mm)		10 (254)	12 (305)	12 (305)
Motor - HP (W)	Fan	1.5	1.5	1.5
	Cylinder	1.5	1.5	1.5
Airflow - cfm		1400	2150	2150
Electrical Specifications - Amps	Gas & Steam Models			
	Q 200-240V/50-60/3	7	11	12
	N 440-480V/50-60/3	4	6	6
	P 380-415V/50-60/3	4	7	7
	Electric Models			
	G 230-240V/50-60/3	147	-	-
	H 380V/50-60/3	94	-	-
	J 400-415V/50-60/3	86	-	-
	K 440V/50-60/3	82	-	-
	L 460-480V/50-60/3	75	-	-
Net Weight - lb (kg)	Gas & Electric	1220 (555)	1400 (635)	1550 (705)
	Steam	1330 (605)	1550 (705)	1700 (770)
Standard Shipping Weight - lb (kg)	Gas	1290 (585)	1480 (670)	1630 (740)
	Steam	1400 (635)	1630 (740)	1780 (805)
	Electric	1320 (600)	-	-
Shipping Dimensions Approx - in (mm)	Width	48 (1220)	52.1 (1320)	52.1 (1320)
	Depth	71.5 (1820)	73.8 (1870)	81.3 (2070)
	Height	90 (2290)	99 (2510)	99 (2510)
Agency Approvals		CSA	CSA	CSA

TO LEARN MORE OR TO FIND A DISTRIBUTOR IN YOUR AREA, VISIT UNIMAC.COM ALLIANCE LAUNDRY SYSTEMS - SHEPARD ST, RIPON, WI 54971 - 1.800.587.5458

Consult your UniMac distributor for details. For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at Alliance Laundry Systems are registered to ISO 9001.